

(12) UK Patent Application (19) GB (11) 2 413 187 (13) A

(43) Date of A Publication 19.10.2005

(21) Application No: 0513696.5
(22) Date of Filing: 05.08.2002
Date Lodged: 04.07.2005
(30) Priority Data:
(31) 0119245 (32) 07.08.2001 (33) GB
(62) Divided from Application No
0218137.8 under Section 15(4) of the Patents Act 1977

(51) INT CL⁷:
G01V 3/165
(52) UK CL (Edition X):
G1N NCLH NCSA N19B2Q
(56) Documents Cited:
EP 1460455 A1 WO 2002/014906 A1
WO 2001/057555 A1
(58) Field of Search:
UK CL (Edition X) G1N
INT CL⁷ G01V
Other:

(71) Applicant(s):
ElectroMagnetic GeoServices AS
(Incorporated in Norway)
Stiklestadveien 1, 7041 Trondheim,
Norway

(continued on next page)

(54) Abstract Title: **Investigation of subterranean reservoirs**

(57) A method of investigating subterranean strata (14), particularly in the seabed, comprises the steps of deploying an electric dipole transmitter antenna (16); deploying an electric dipole receiver antenna (15) at a predetermined offset from the transmitter; applying an electromagnetic wave field to the strata and detecting the wave field response; extracting phase information from the response; repeating the procedure with the transmitter and/or receiver in different locations for a plurality of transmissions; and using the phase information from the plurality of transmission responses to determine the presence and/or nature of any reservoir (18) present; in which method the transmission wavelength λ through the overburden is between $0.1s$ and $10s$ where s is the distance from the seabed to the reservoir, the offset between transmitter and receiver is between 0.5λ and 10λ , and the transmission frequency is from 0.01 Hz to 1kHz. A refracted wave response provides useful information in the wave field response.

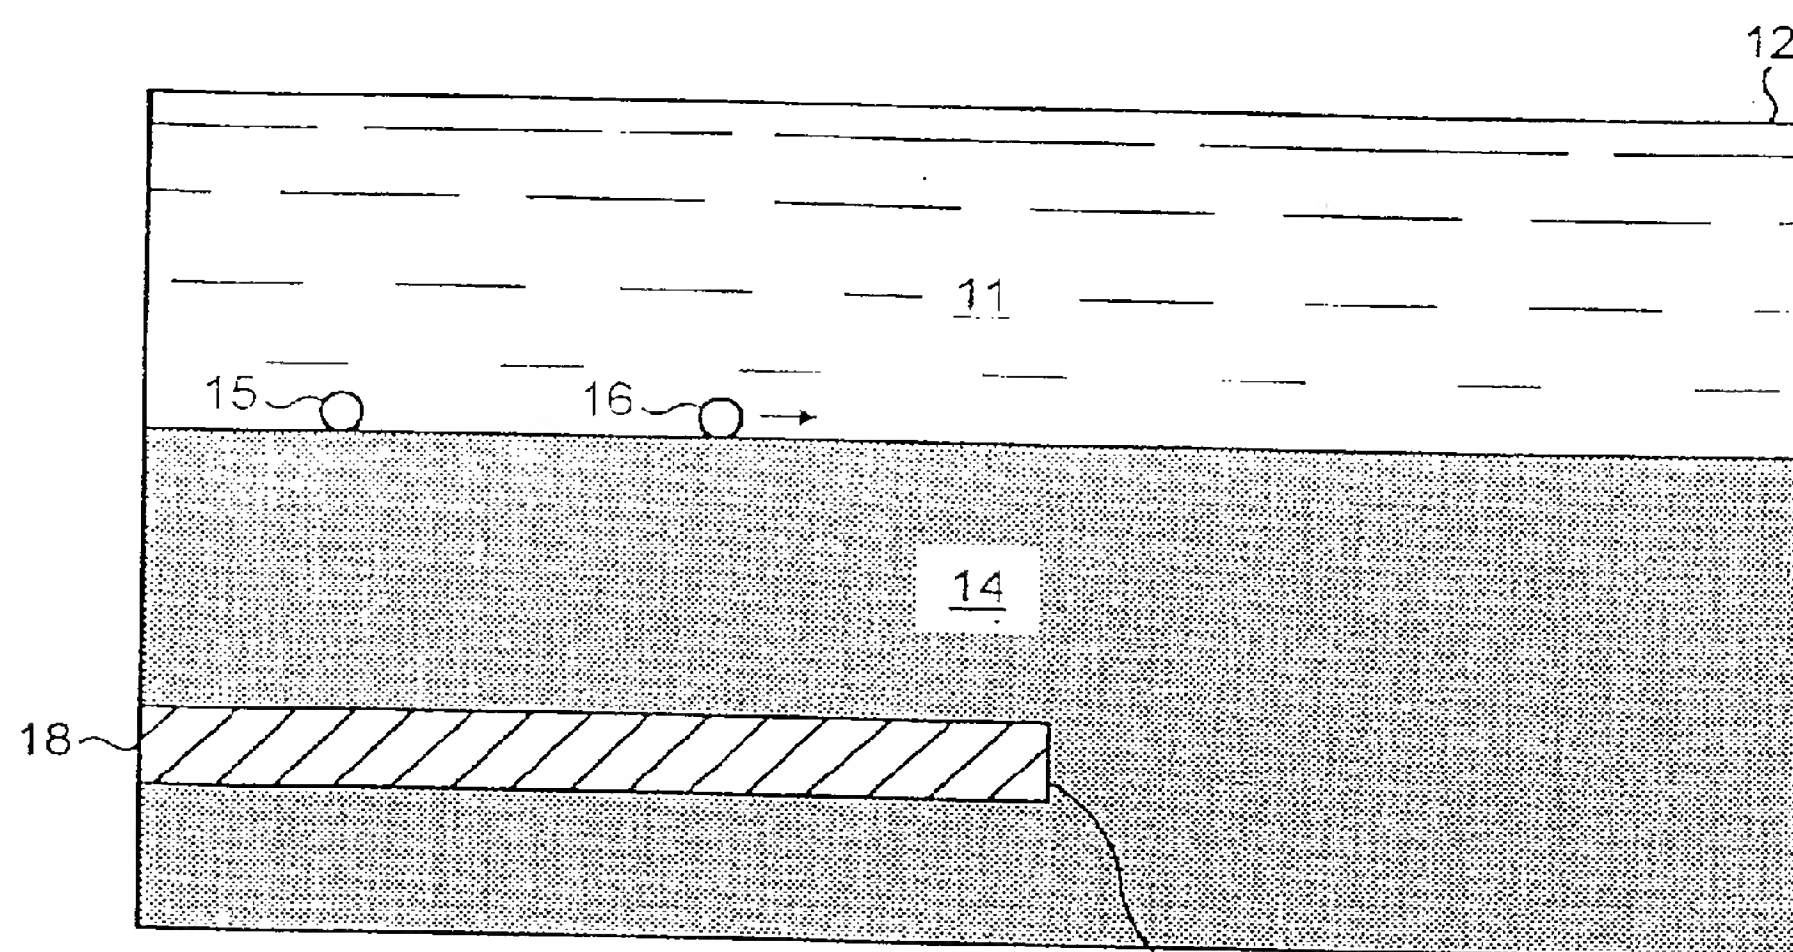


FIG. 3

GB 2413187 A continuation

(72) Inventor(s):
Svein Ellingsrud
Terje Eidesmo
Harald Westerdahl
Fan-Nian Kong

(74) Agent and/or Address for Service:
Kilburn & Strode
20 Red Lion Street, LONDON, WC1R 4PJ,
United Kingdom

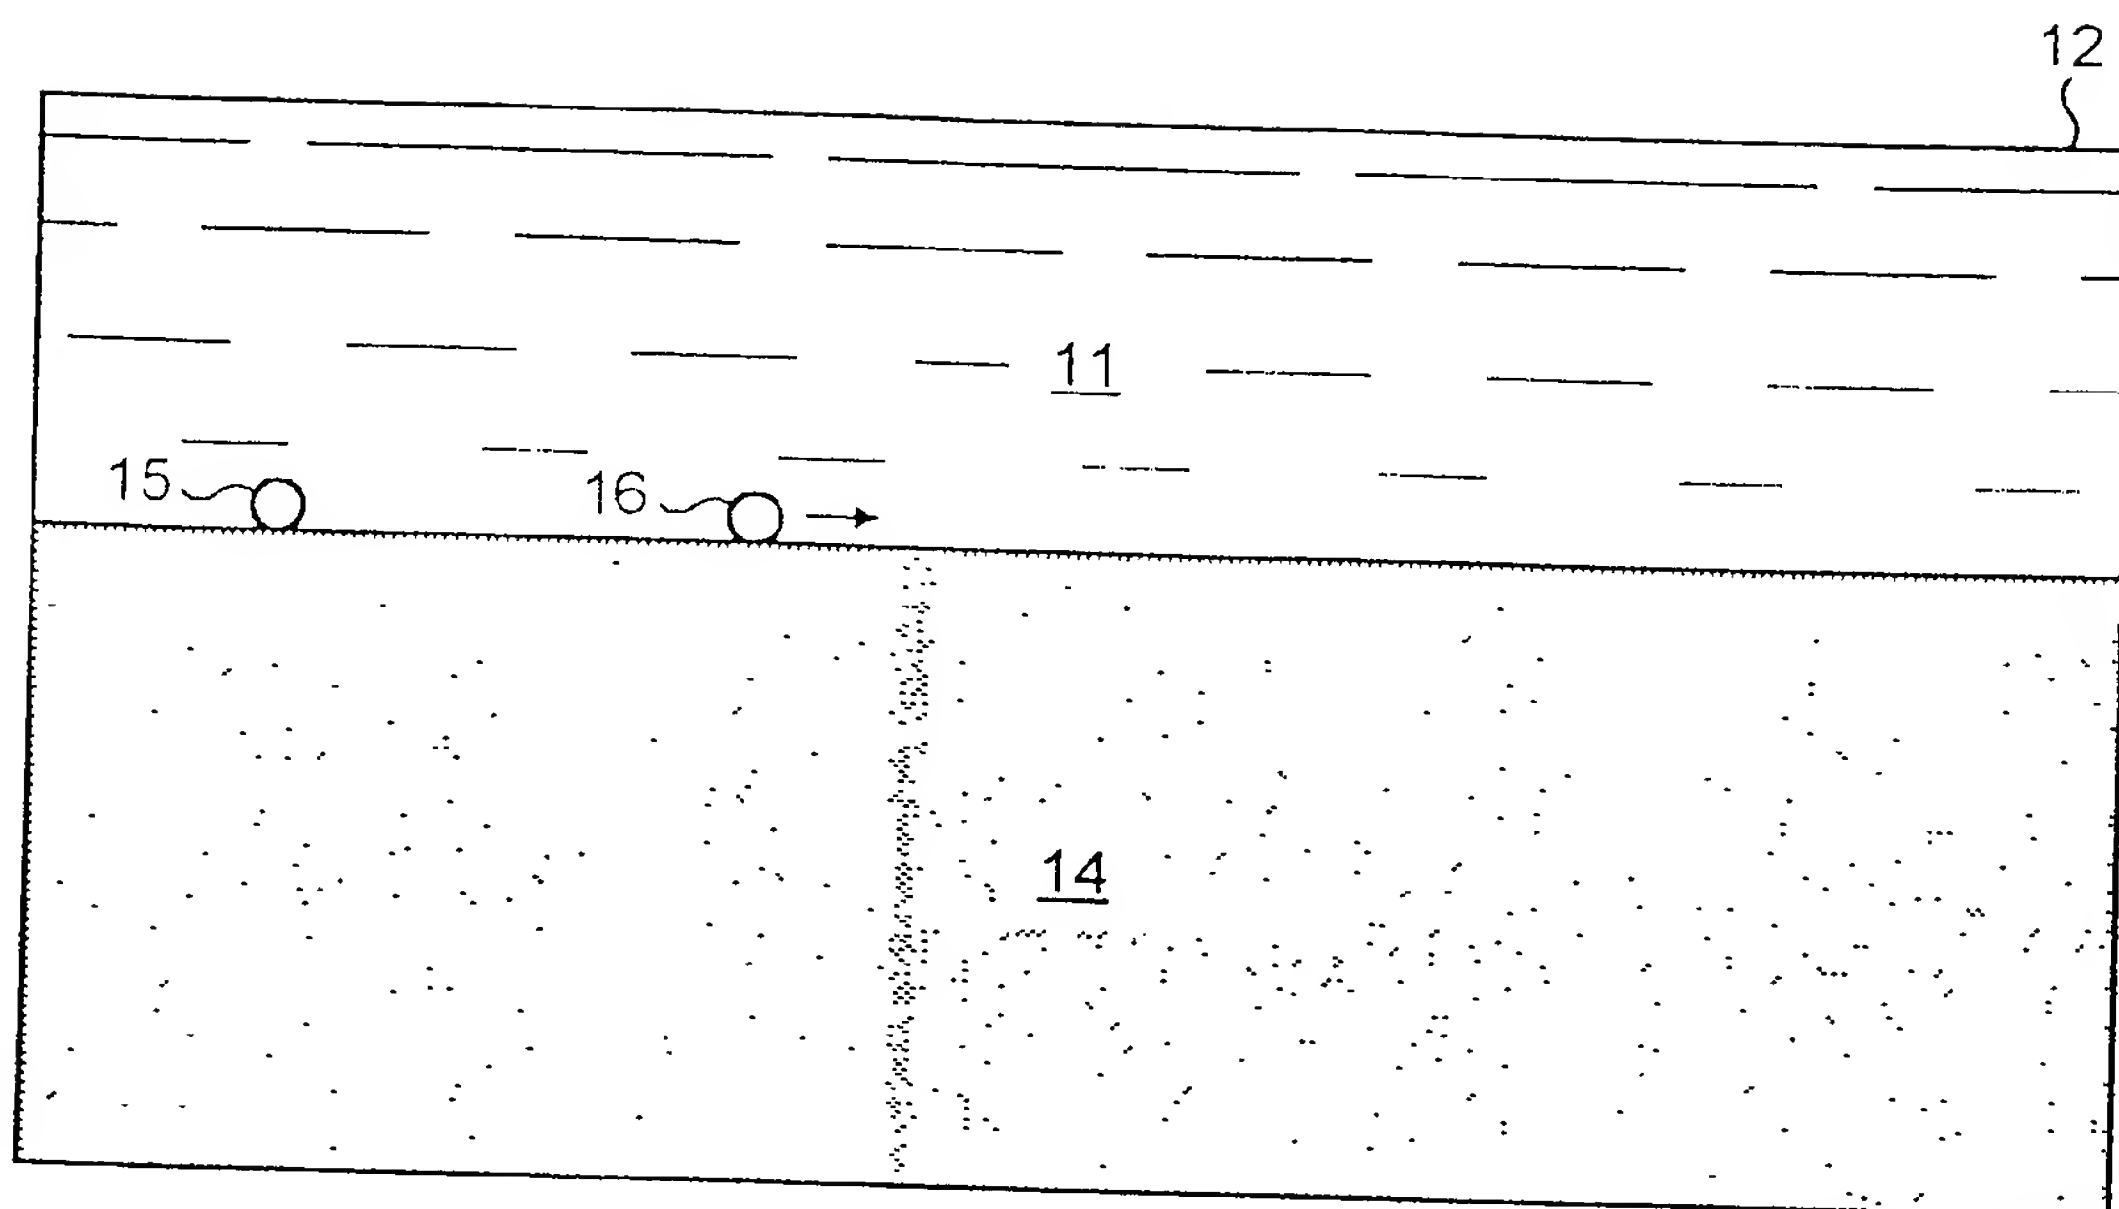


FIG. 1

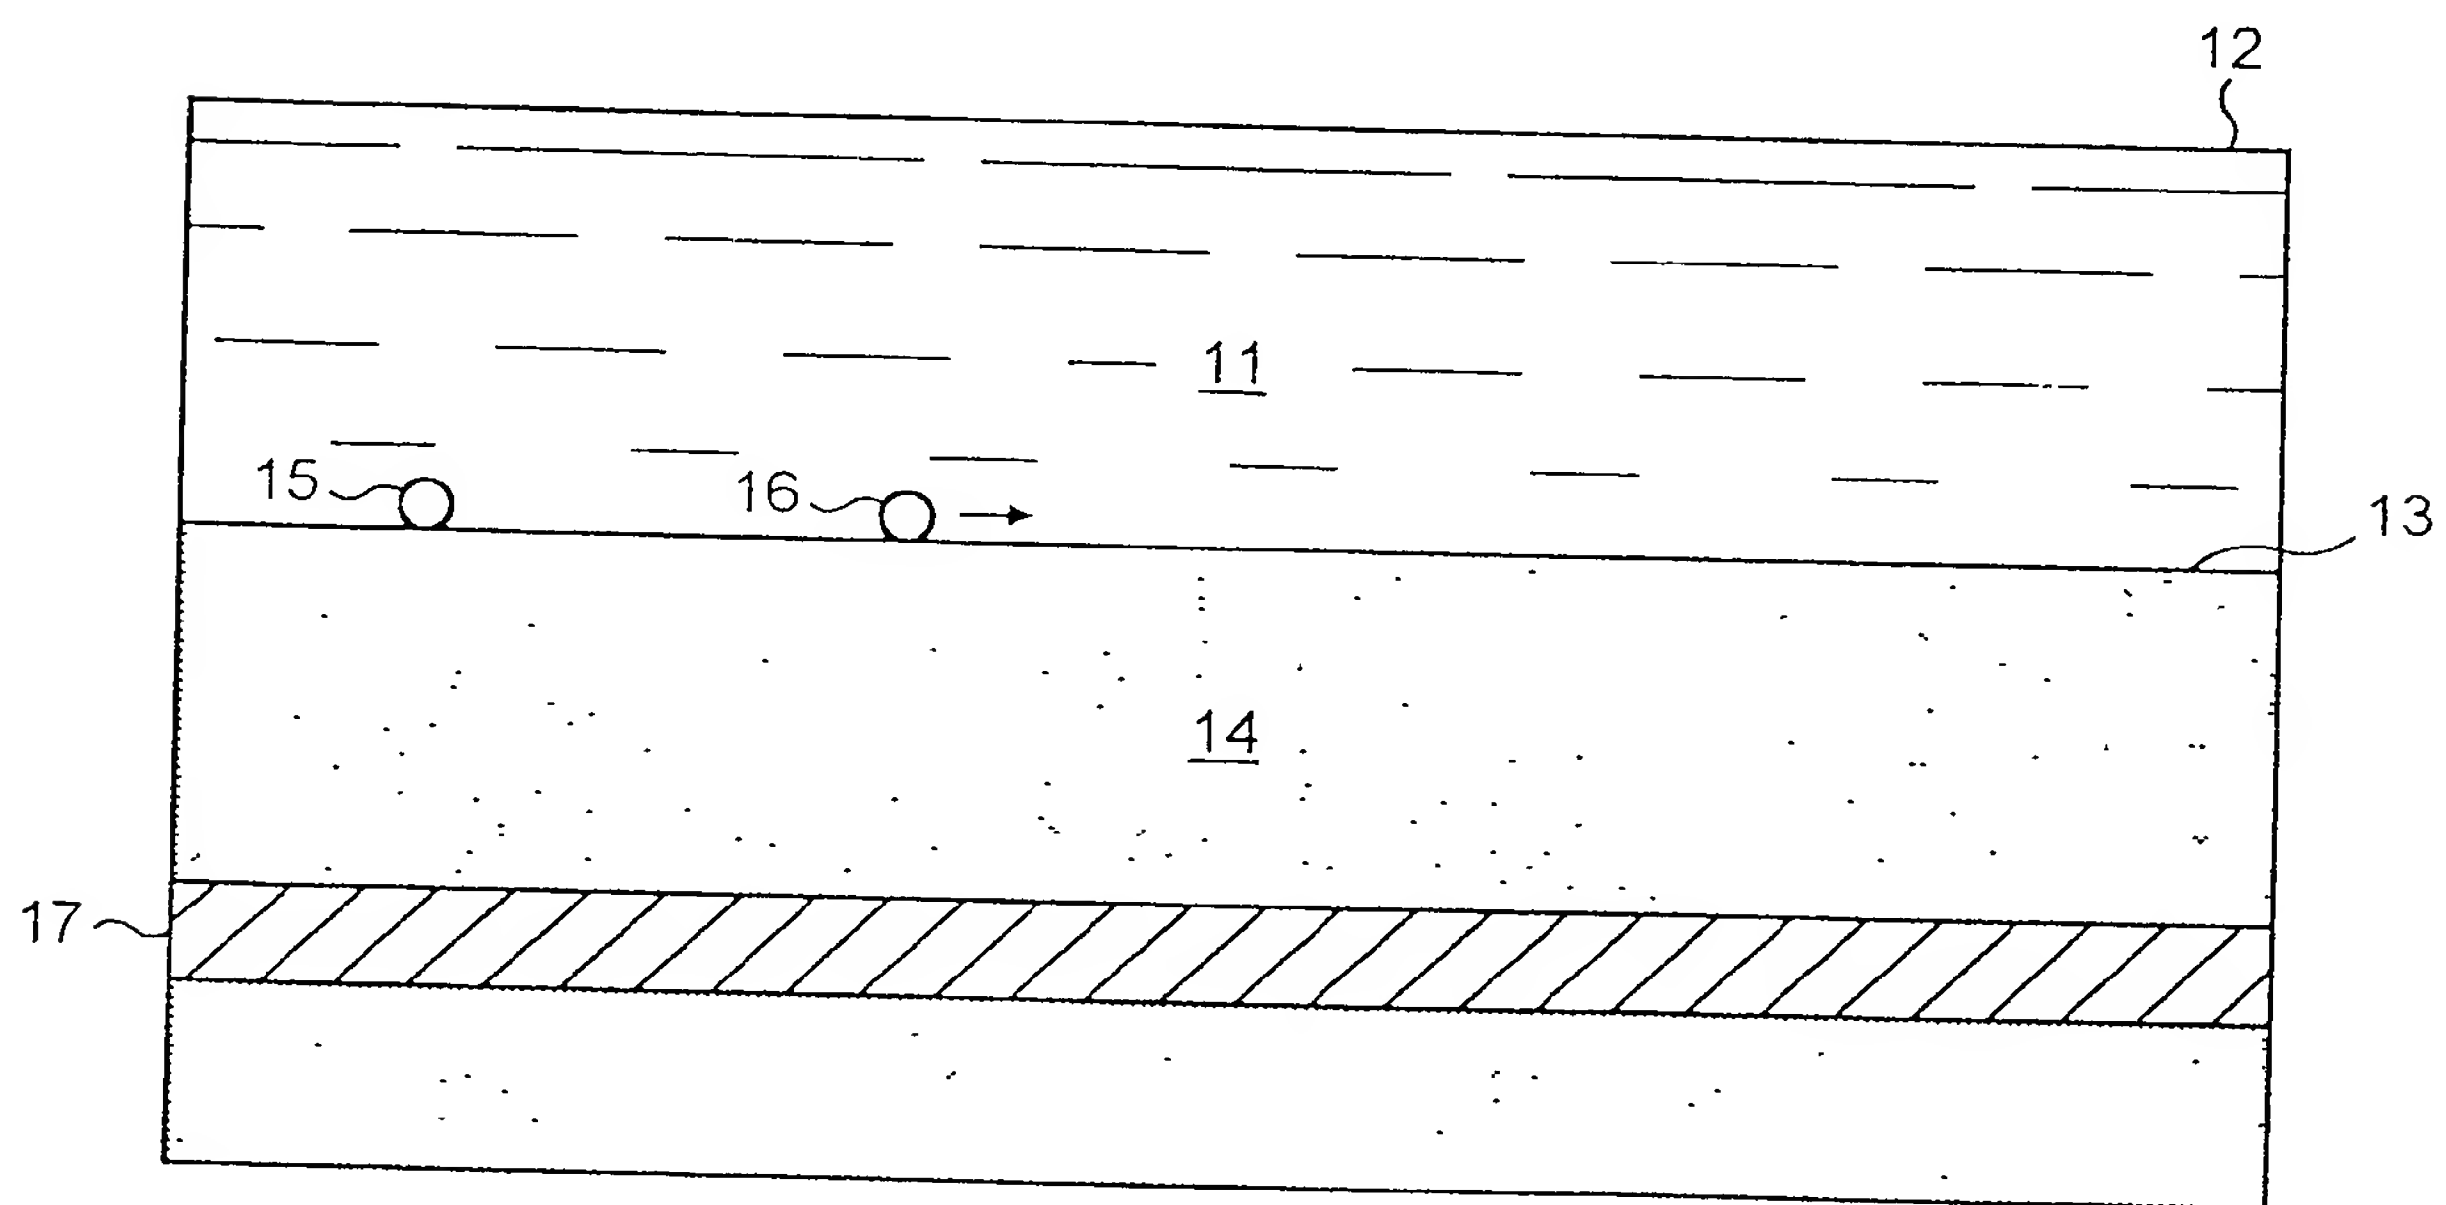


FIG. 2

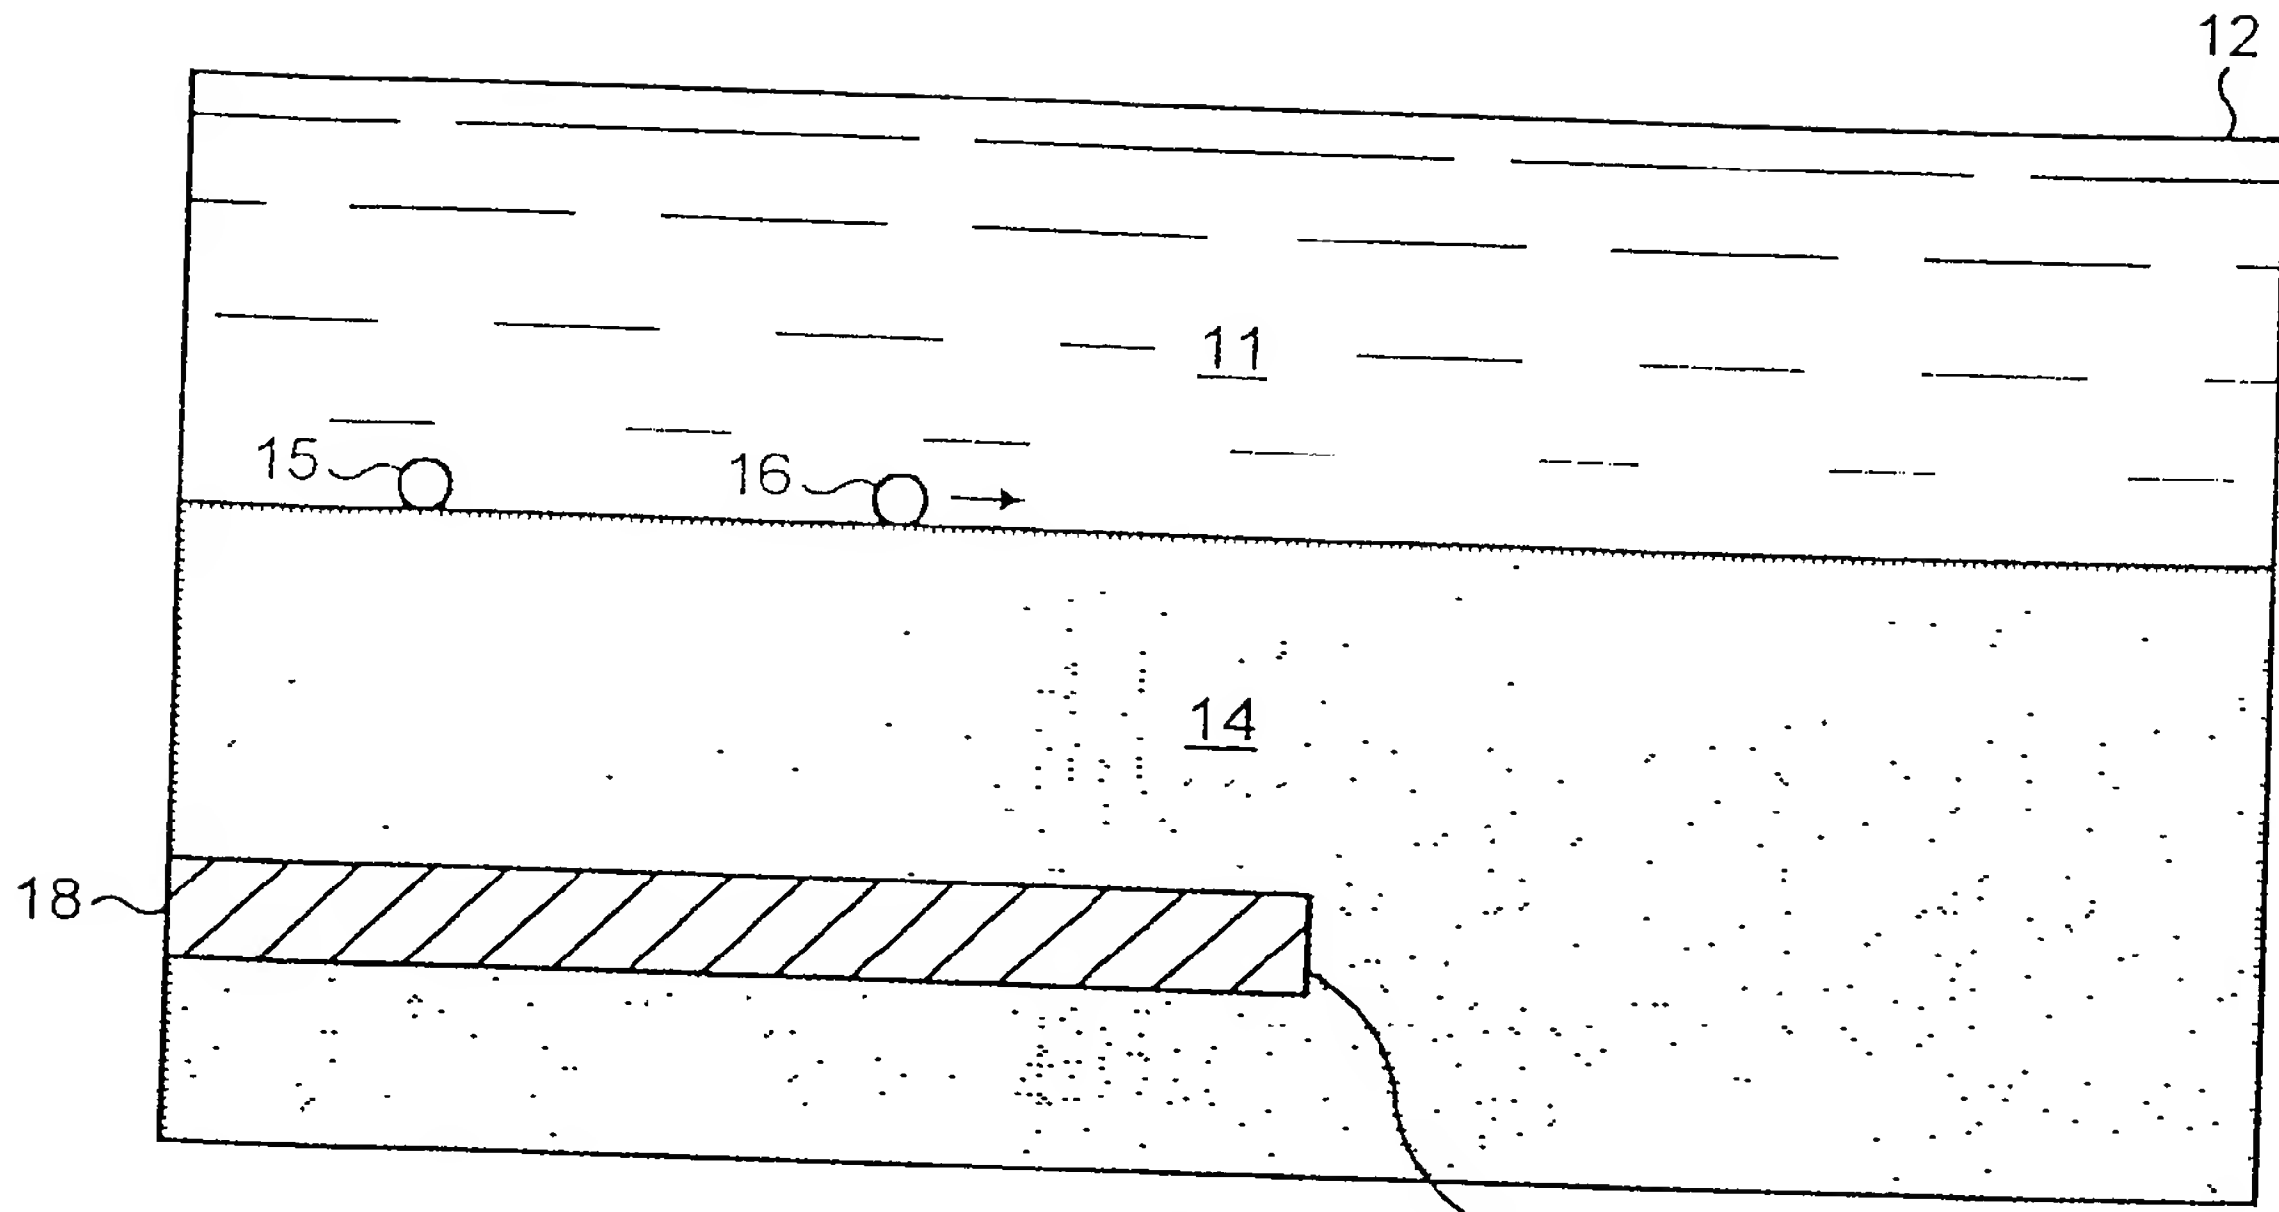


FIG. 3

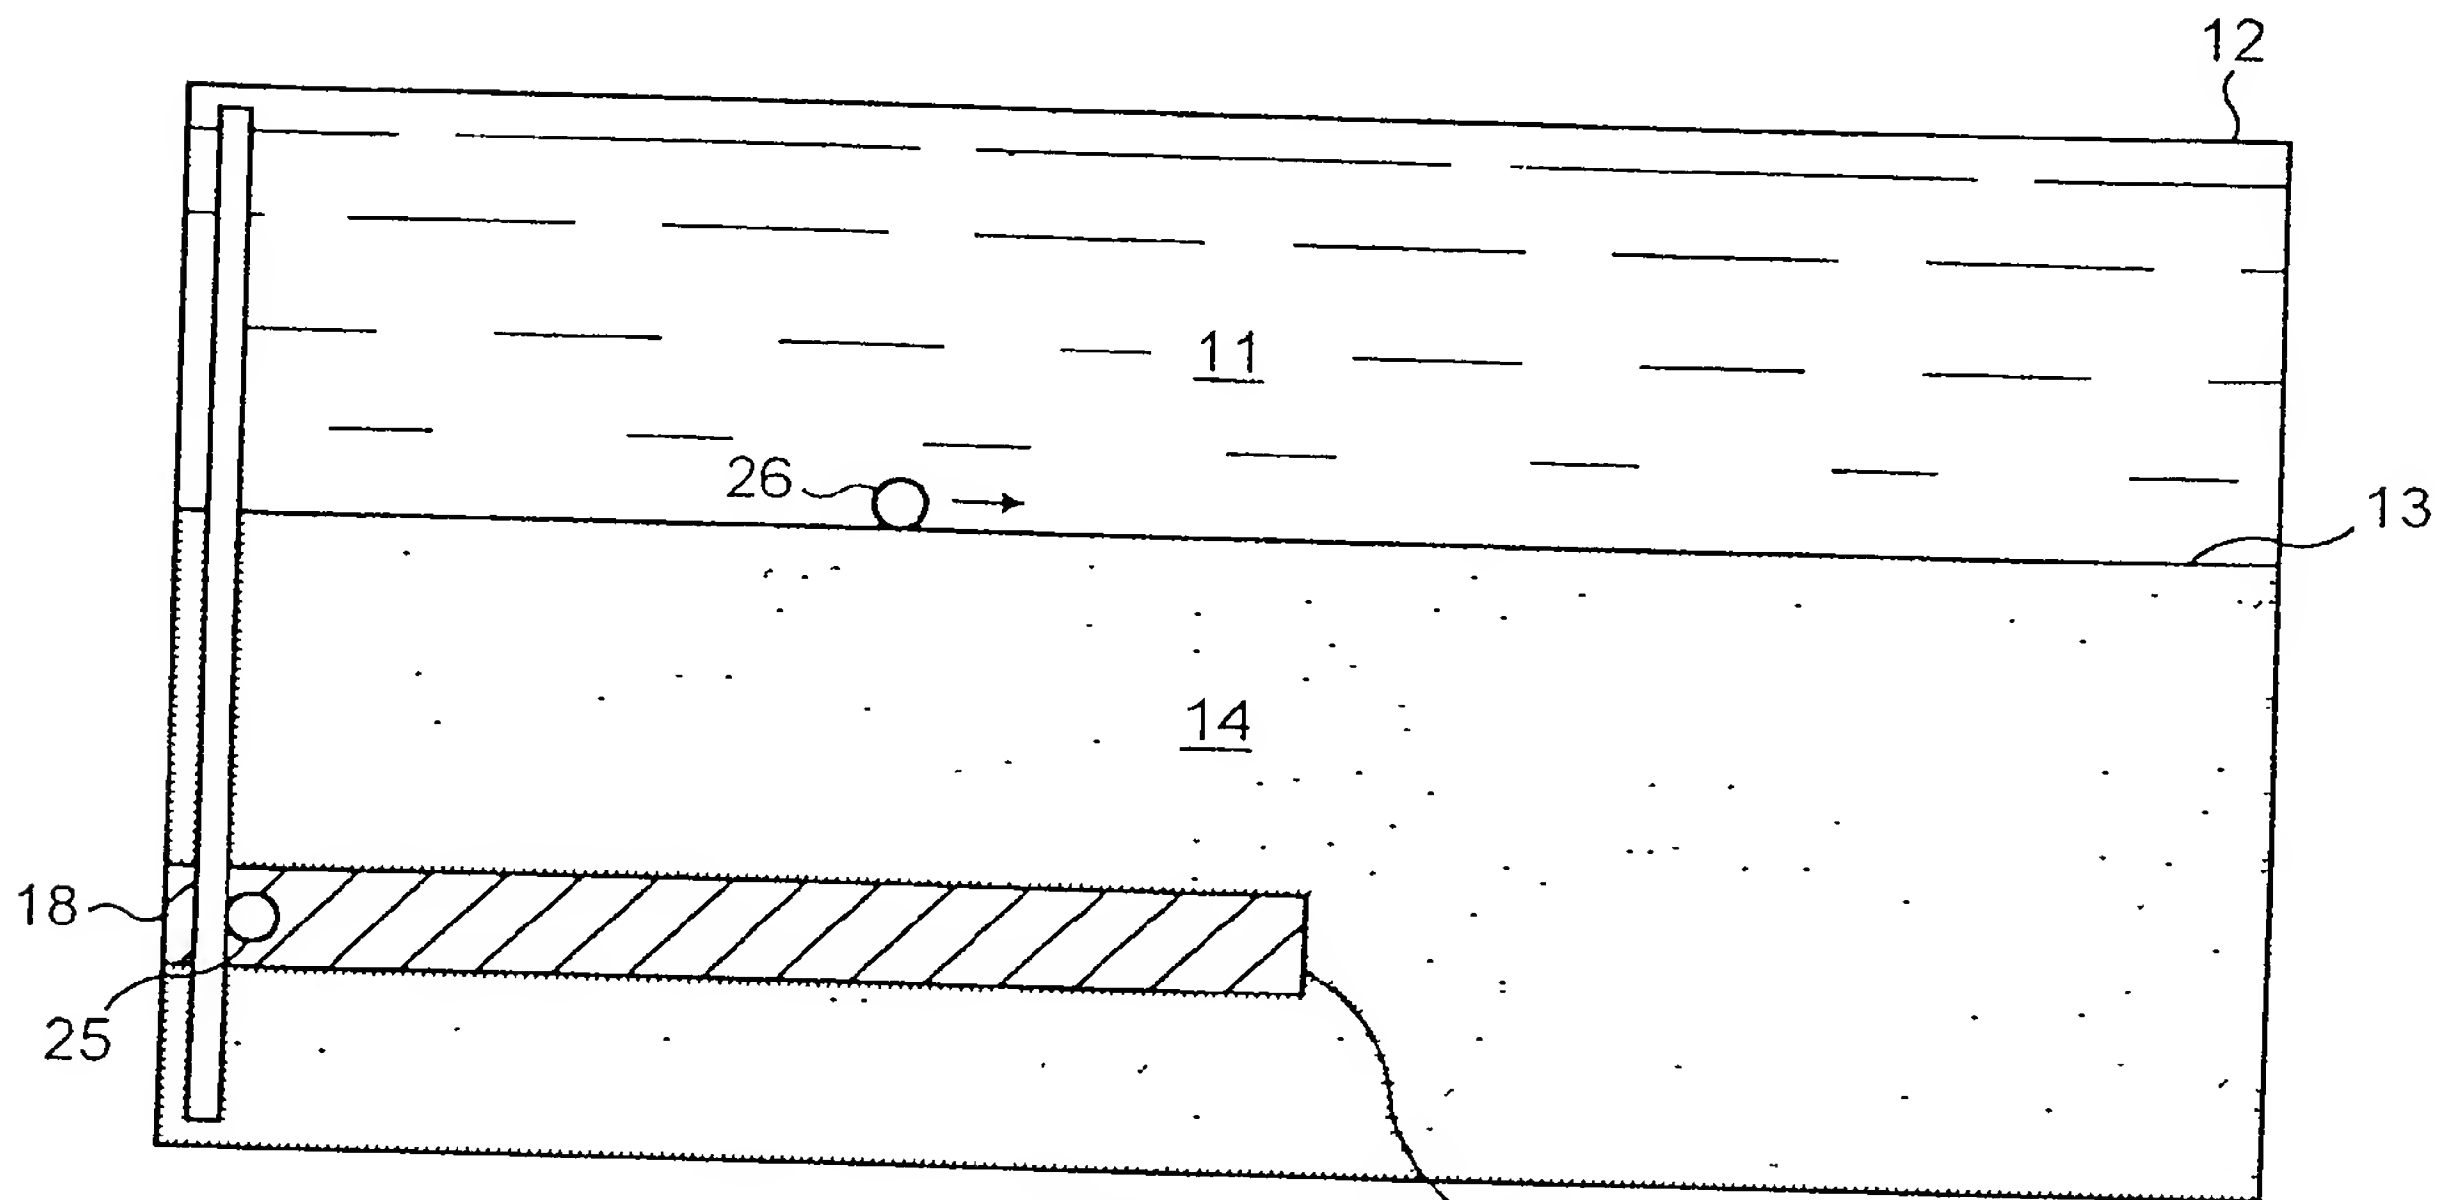


FIG. 4

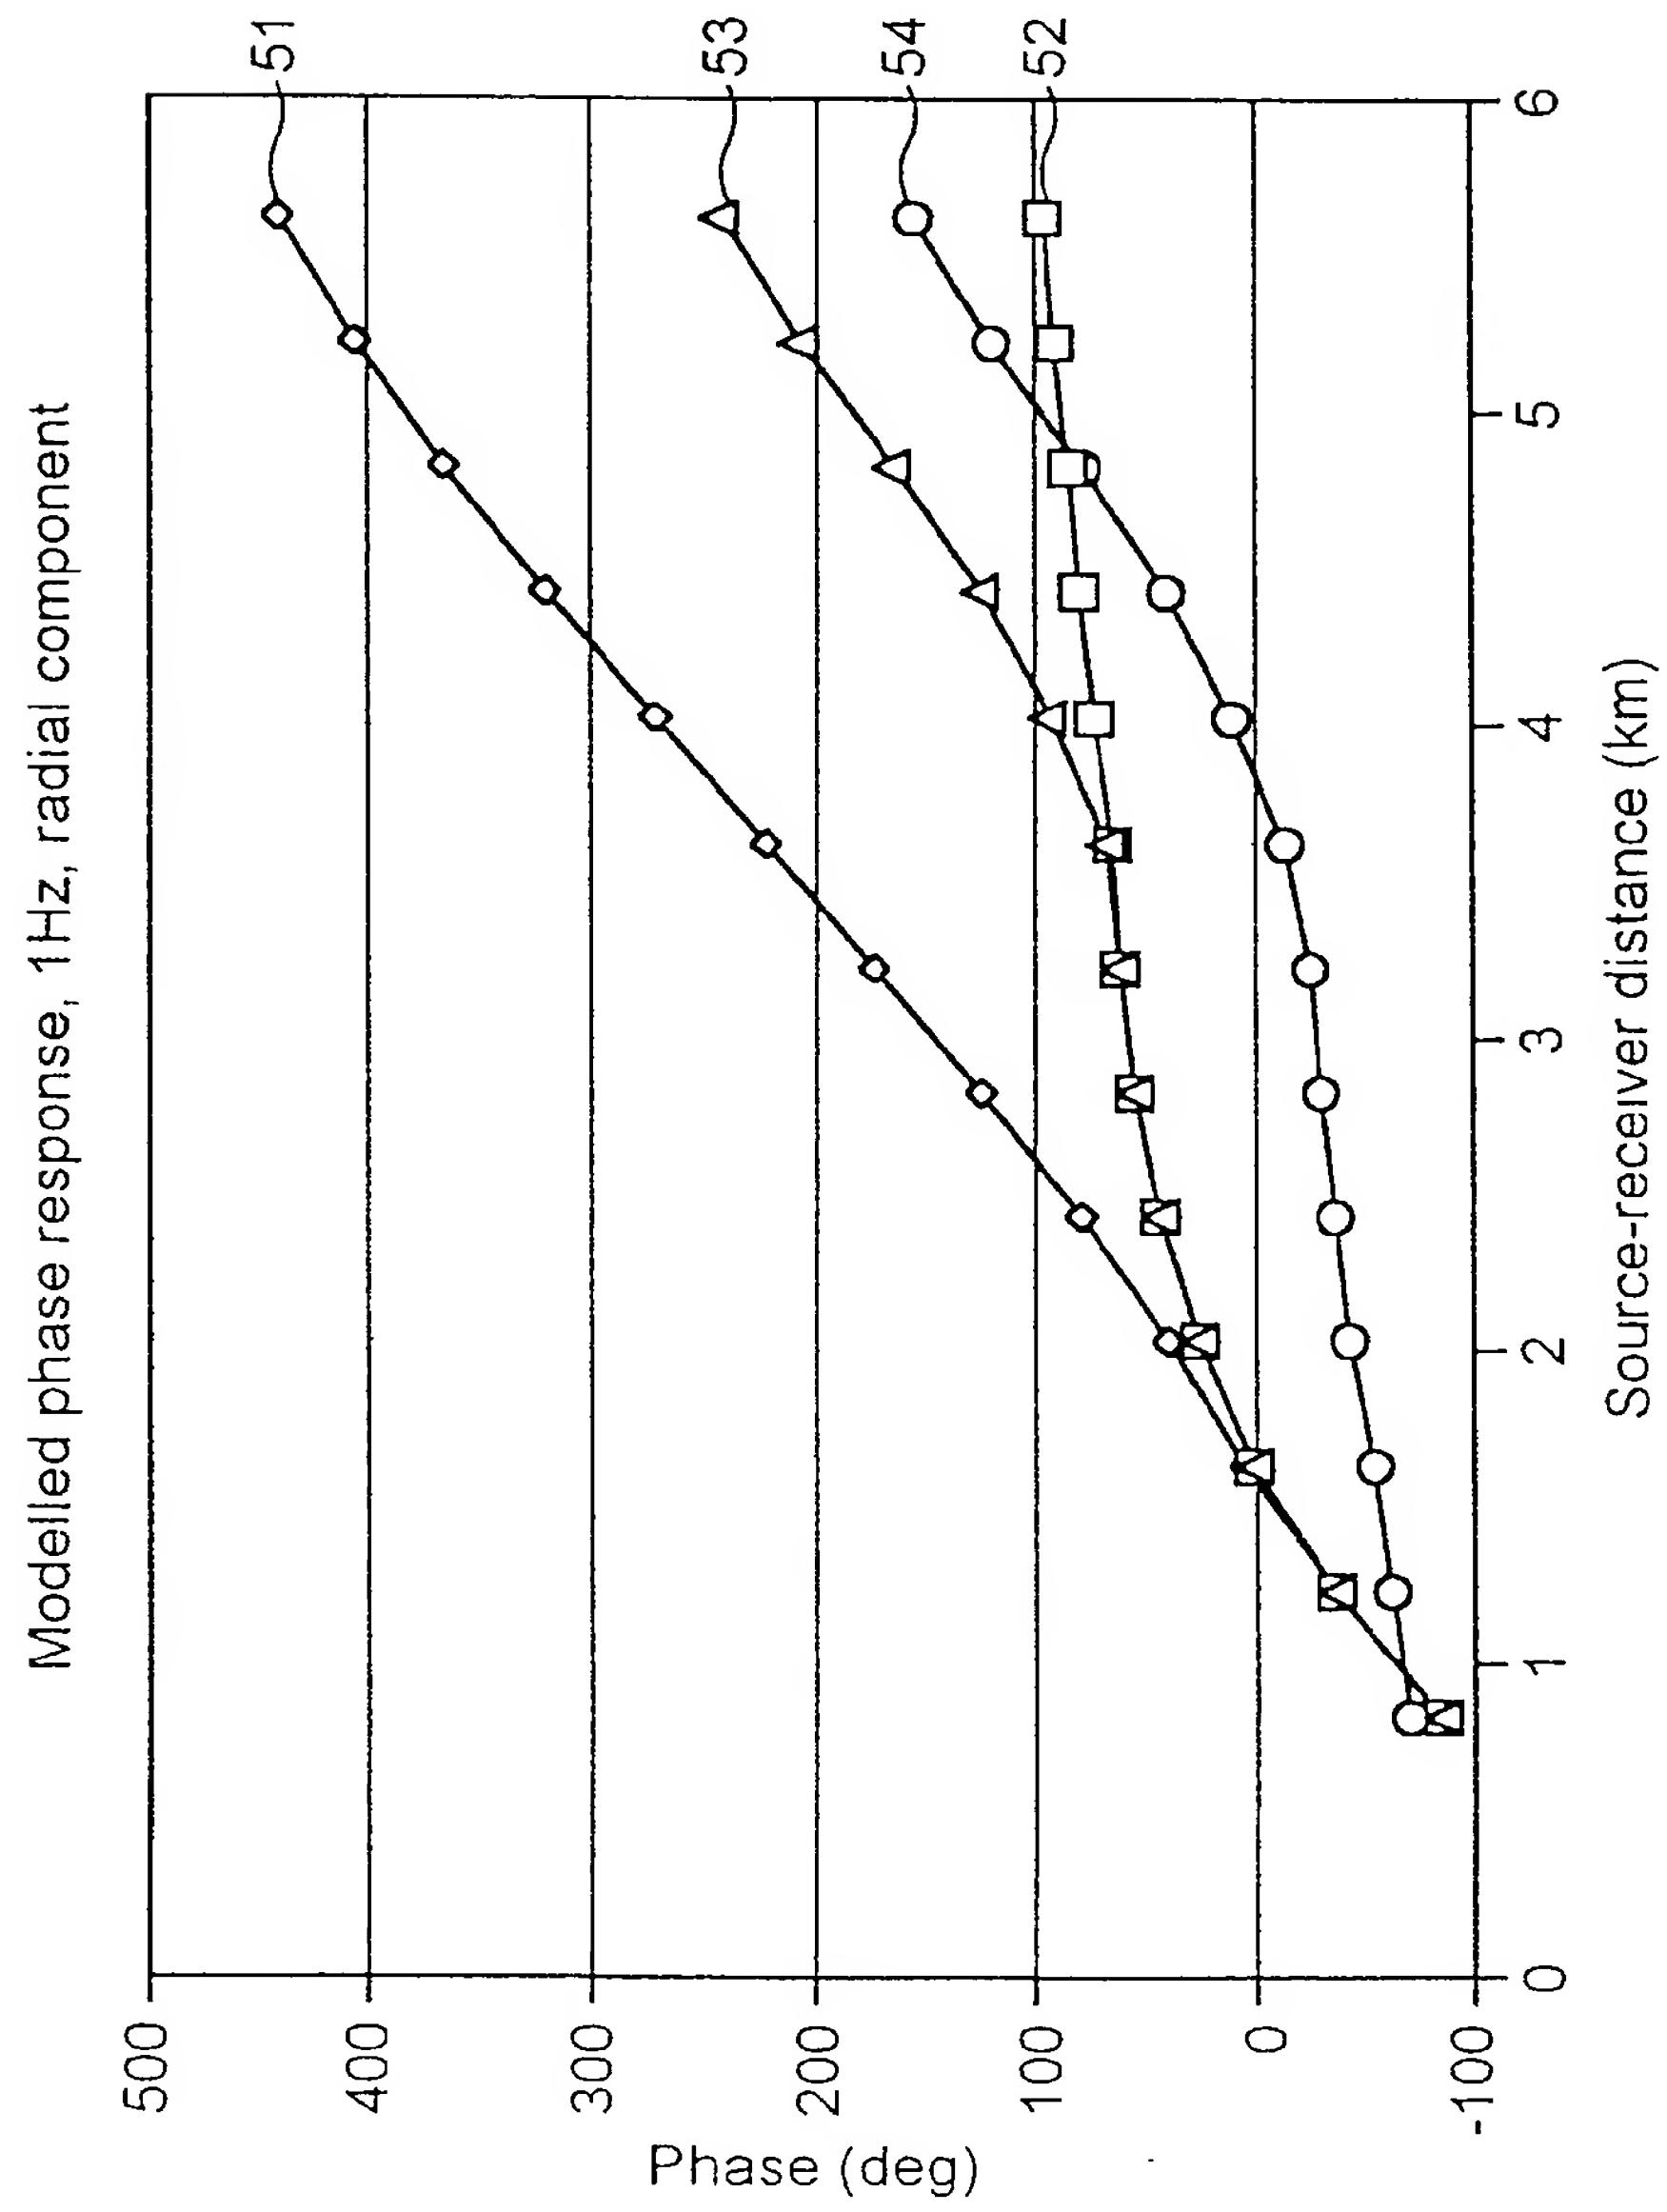


FIG. 5

Method and Apparatus for Determining
the Nature of Subterranean Reservoirs

5 The present invention relates to a method and apparatus for determining the nature of submarine and subterranean reservoirs. The invention is particularly suitable for determining whether a reservoir, whose approximate geometry and location are known, contains hydrocarbons or water, and also for detecting reservoirs with particular characteristics.

10 Currently, the most widely used techniques for geological surveying, particularly in sub-marine situations, are seismic methods. These seismic techniques are capable of revealing the structure of the subterranean strata with some accuracy. However, whereas a seismic survey can reveal the location and shape of a potential reservoir, it can normally not reveal the nature of the reservoir.

15 The solution therefore is to drill a borehole into the reservoir. However, the costs involved in drilling an exploration well tend to be in the region of £25m and since the success rate is generally about 1 in 10, this tends to be a very costly exercise.

20 It is therefore an object of the invention to provide a system for locating a subterranean reservoir and for determining, its nature with greater certainty, without the need to sink a borehole.

25 It has been appreciated by the present applicants that while the seismic properties of hydrocarbon filled strata and water-filled strata do not differ significantly, their electromagnetic resistivities do differ. Thus, by using an electromagnetic surveying method, these differences can be exploited and the success rate in predicting the nature of a reservoir can be increased significantly. This represents potentially an enormous cost saving.

Consequently, a method and apparatus embodying these principles from the basis of the present applicant's International British patent application No. WO 01/57555.

5 This contemplates a method of determining the nature of a subterranean reservoir whose approximate geometry and location are known, which comprises: applying a time varying electromagnetic field to the strata containing the reservoir; detecting the electromagnetic wave field response; seeking in the wave field response, a component representing a refracted wave from the hydrocarbon layer; and determining the content of the reservoir, based on the presence or absence of a wave component refracted by the hydrocarbon layer.

10 It also contemplates a method for searching for a hydrocarbon containing subterranean reservoir which comprises: applying a time varying electromagnetic field to subterranean strata; detecting the electromagnetic wave field response; seeking, in the wave field response, a component representing a refracted wave; and determining the presence and/or nature of any reservoir identified based on the presence or absence of a wave component refracted by hydrocarbon layer.

15 It further contemplates an apparatus for determining the nature of a subterranean reservoir whose approximate geometry and location are known, or for searching for a hydrocarbon containing subterranean reservoir, the apparatus comprising: means for applying a time varying electromagnetic field to the strata containing the reservoir; means for detecting the electromagnetic wave field response; and means for seeking, in the wave field response, a component representing a refracted wave, thereby enabling the presence and/or nature of a reservoir to be determined.

20 A refracted wave behaves differently, depending on the nature of the stratum in which it is propagated. In particular, the propagation losses in hydrocarbon stratum are much lower than in a water-bearing stratum while the speed of propagation is much higher.

25 Thus, when an oil-bearing reservoir is present, and an EM field is applied, a strong and

rapidly propagated refracted wave can be detected. This may therefore indicate the presence of the reservoir or its nature if its presence is already known.

Electromagnetic surveying techniques in themselves are known. However, they are not widely used in practice. In general, the reservoirs of interest are about 1 km or more below the seabed. In order to carry out electromagnetic surveying as a stand alone technique in these conditions, with any reasonable degree of resolution, short wavelengths are necessary. Unfortunately, such short wavelengths suffer from very high attenuation. Long wavelengths do not provide adequate resolution. For these reasons, seismic techniques are preferred.

However, while longer wavelengths applied by electromagnetic techniques cannot provide sufficient information to provide an accurate indication of the boundaries of the various strata, if the geological structure is already known, they can be used to determine the nature of a particular identified formation, if the possibilities for the nature of that formation have significantly differing electromagnetic characteristics. The resolution is not particularly important and so longer wavelengths which do not suffer from excessive attenuation can be employed.

The resistivity of seawater is about 0.3 ohm-m and that of the overburden beneath the seabed would typically be from 0.3 to 4 ohm-m, for example about 2 ohm-m. However, the resistivity of a hydrocarbon reservoir is likely to be about 20-300 ohm-m. Typically, therefore, the resistivity of a hydrocarbon-bearing formation will be 20 to 300 times greater than that of a water-bearing formation. This large difference can be exploited using the techniques of the present invention.

The electrical resistivity of a hydrocarbon reservoir normally is far higher than the surrounding material (overburden). EM-waves attenuate more rapidly, and travel slower inside a low resistivity medium, compared to a high resistivity medium. Consequently, hydrocarbon reservoir will attenuate EM-waves less, compared to a

lower resistivity overburden. Furthermore, the EM-wave speed will be higher inside the reservoir.

Thus, an electric dipole transmitter antenna on or close to the sea floor induces electromagnetic EM fields and currents in the sea water and in the subsurface strata. In the sea water, the EM-fields are strongly attenuated due to the high conductivity in the saline environment, whereas the subsurface strata with less conductivity causes less attenuation. If the frequency is low enough (in the order of 1 Hz), the EM energy is able to penetrate deep into the subsurface, and deeply buried geological layers having higher electrical resistivity than the overburden (as e.g. a hydrocarbon filled reservoir) will affect the EM-waves. Depending on the angle of incidence and state of polarisation, an EM wave incident upon a high resistive layer may excite a ducted (guided) wave mode in the layer. The ducted mode is propagated laterally along the layer and leaks energy back to the overburden and receivers positioned on the sea floor. In the present application, such a wave mode is referred to as a "refracted wave".

The distance between the EM source and a receiver is referred to as the offset. Due to the fact that a refracted wave in a hydrocarbon-bearing formation will be less attenuated than a direct wave in seawater (or in the overburden), for any given H/C bearing formation, there will be a critical offset at which the refracted wave and the direct wave will have the same signal strength. This may typically be about two to three times greater than the shortest distance from the source (or receiver to the H/C bearing formation). Thus, when the offset is greater than the critical offset, the radial EM waves that are refracted into, and guided through the reservoir, will pay a major contribution to the received signal. The receiver signal will be of greater magnitude and arrive earlier (i.e. have smaller phase) compared to the case where there is no HC reservoir. In many cases, the phase change and/or magnitude change recorded at distances greater than the critical offset, may be directly used for calculation of the reservoir resistivity. Furthermore, the reservoir depth may be inferred from the critical

offset and/or the phase and magnitude slopes for various source – receiver offsets.

According to one aspect of the present invention, there is provided a method of investigating subterranean strata which comprises: deploying an electric dipole transmitter antenna; deploying an electric dipole receiver antenna at a predetermined offset distance from the transmitter; applying an electromagnetic (EM) wave field to the strata using the transmitter; detecting the EM wave field response using the receiver; extracting phase information from the wave response; repeating the procedure with the transmitter and/or receiver in different locations for a plurality of transmissions; and using the phase information from the wave response for the plurality of transmissions, in order to determine the presence and/or nature of any reservoir present; in which method, the wavelength of the transmission is given by the formula

$$0.1s \leq \lambda \leq 10s;$$

wherein λ is the wavelength of the transmission through the overburden and s is the distance from the seabed to the reservoir; the predetermined offset between the transmitter and a receiver is given by the formula

$$0.5\lambda \leq L \leq 10\lambda;$$

where λ is the wavelength of the transmission through the overburden and L is the distance between the transmitter and the receiver; and the transmission frequency is from 0.01 Hz to 1 kHz.

Preferably, the wavelength of the transmission is in the range

$$0.1s \leq \lambda \leq 5s.$$

More preferably λ is from about 0.5s to 2s. The transmission frequency is preferably

from 0.1 to 20 Hz, for example 1 Hz.

Thus, the offset can be varied by moving the receiver; or indeed the transmitter, or even both. Alternatively, the predetermined offset can be kept constant by moving both the transmitter and receiver.

Preferably, the method includes the step of seeking in the wave field response, a component representing a refracted wave, and then extracting and using the refracted wave response.

Thus, the horizontal boundaries of the reservoir may be found by analysing the slope and/or slope change of the curve(s) of phase and/or magnitude as a function of source-receiver offset distance or position, or by analysing the variation in phase and/or magnitude for a fixed source-receiver offset at several locations. The most useful source-receiver offset is typically larger than the "critical offset". In this part of the curve, the change in slope, may indicate the reservoir boundary.

Both the source and the receiver are preferably inside the reservoir area to achieve the smallest slope (or gradient). This is true for both the phase and the magnitude curves. Soon after either the source or the receiver leaves the reservoir area, the slopes increase rapidly. From the position where this change occurs, the reservoir boundary may be mapped. The true reservoir boundary will probably lie closer the centre of the reservoir compared to the location where the slope change occurred, typically 10 to 20% of the reservoir depth. The detailed position may be calculated using the measured data and forward modelling.

This technique of the invention can be used in conjunction with conventional seismic techniques to identify hydrocarbon reservoirs.

If the offset between the transmitter and receiver is significantly greater than three

times the depth of the reservoir from the seabed (i.e. the thickness of the overburden), it will be appreciated that the attenuation of the refracted wave will often be less than that of direct wave and the reflected wave. The reason for this is the fact that the path of the refracted wave will be effectively distance from the transmitter down to the reservoir i.e. the thickness of the overburden, plus the offset along the reservoir, plus the distance from the reservoir up to the receivers i.e. once again the thickness of the overburden.

If no H/C reservoir is present in the area of the transmitter and receiver, the phase of the detected wave response will consist of a direct wave and will therefore change linearly with a changing offset. Similarly, the phase of the detected wave response will remain constant at a constant offset in different locations.

However, if an H/C reservoir is present, there will be a refracted wave component in the wave response and this may predominate. Due to the higher phase velocity (wavespeed) in H/C filled strata, this will have an effect on the phase of the received wave response. In the case of an increasing offset, the phase will not change linearly; a plot of phase against offset will be a curve with a constantly changing slope. Thus, a change from a straight line to a curve, or vice versa, will indicate the boundary of an H/C reservoir.

In the case of a constant offset, the presence of an H/C reservoir will give rise to a constant but different phase value at different locations compared to the situation where no H/C reservoir is present. Thus, a change in phase value will indicate the boundary of an H/C reservoir.

Preferably, the procedure is repeated at different offsets.

In one embodiment, the method includes plotting a graph of the phase of the refracted wave response from a particular stratum against offset and analysing the slope of the

graph in order to determine the nature of the stratum. Alternatively, the method includes plotting a graph of the phase of the reflected wave response from a particular stratum and identifying a change in the slope of the graph.

5 In another embodiment, the method comprises repeating the procedure at different locations, using the same predetermined offset, and analysing the phase of the refracted wave response from a particular stratum in order to identify a change in the phase value.

10 The polarization of the source transmission will determine how much energy is transmitted into the oil-bearing layer in the direction of the receiver. A dipole antenna is therefore the selected transmitter. In general, it is preferable to adopt a dipole with a large effective length. The transmitter dipole may therefore be 100 to 1000 meters in length and may be towed in two orthogonal directions. The receiver dipole optimum
15 length is determined by the thickness of the overburden.

The technique can be applicable in exploring land-based subterranean reservoirs but is especially applicable to submarine, in particular sub-sea, subterranean reservoirs. Preferably the field is applied using one or more transmitters located on the earth's
20 surface, and the detection is carried out by one or more receivers located on the earth's surface. In a preferred application, the transmitter(s) and/or receivers are located on or close to the seabed or the bed of some other area of water.

The transmitted field may be pulsed, however, a coherent continuous wave optionally
25 with stepped frequencies is preferred. It may be transmitted for a significant period of time, during which the transmitter should preferably be stationary (although it could be moving slowly), and the transmission stable. Thus, the field may be transmitted for a period of time from 3 seconds to 60 minutes, preferably from 10 seconds to 5 minutes, for example about 1 minute. The receivers may also be arranged to detect a
30 direct wave as well as the refracted wave from the reservoir, and the analysis may

include extracting phase and amplitude data of the refracted wave from corresponding data from the direct wave.

5 It will be appreciated that the present invention may be used to determine the position, the extent, the nature and the volume of a particular stratum, and may also be used to detect changes in these parameters over a period of time.

10 The present invention also extends to a method of surveying subterranean measures which comprises; performing a seismic survey to determine the geological structure of a region; and where that survey reveals the presence of a subterranean reservoir, subsequently performing a method as described above.

15 The invention may be carried into practice in various ways and will now be illustrated in the following simulated Examples. In the accompanying drawings,

Figure 1 is a schematic representation of a situation in which measurements are taken outside the area of a reservoir;

20 Figure 2 is a schematic representation of a situation in which measurements are taken inside the area of a HC reservoir;

Figure 3 is a schematic representation of a situation in which measurements are taken crossing a H/C reservoir boundary;

25 Figure 4 is a view similar to Figure 3, in which the receiver is in a borehole; and

Figure 5 is a graphical representation of the results from the situations in Figures 1 to 4.

30 In Figures 1 to 4, it is assumed that the sea 1 has a resistivity of 0.3 ohm-m and a

depth of 1000m from the surface 12 to the seabed 13. The overburden 14 has a resistivity of 0.7 ohm-m. The transmitted wave had a frequency of 1 Hz.

Figure 1 shows the situation where a receiver 15 and a transmitter 16 are located on the seabed 13 in a region where there is no subterranean reservoir. The position of the receiver 15 is fixed. The transmitter 16 is moved to various different positions resulting in different offsets from the receiver 15. At each position of the transmitter 16, an EM field is transmitted and the wave field response is detected by the receiver 15. The wave field response includes a direct wave component and reflected wave components. Phase information is extracted for each response and the results are plotted as a graph in Figure 5. The plot of phase against offset (source-receiver distance) is a straight line 51, showing that the phase varies linearly with offset.

Figure 2 shows the situation where the transmitter 15 and receiver 16 are deployed in a region where there is a subterranean H/C reservoir 17. The reservoir 17 is 100m thick and has a resistivity of 50 ohm-m, and is located at a depth of 800 m beneath the seabed 13. The procedure described in relation to Figure 1 is repeated and again the results are shown in Figure 5.

In this case, the wave field response additionally includes a refracted wave component from the reservoir 17. This affects the phase of the response and results in the plot of phase against offset taking the form of a smooth curve 52, with a constant change of slope.

Figure 3 shows the situation where the transmitter 15 and receiver 16 are deployed in a region where there is an H/C reservoir 18 with a boundary 19. The reservoir 18 is similar to that in Figure 2 but its boundary 19 is at a position 3km away from the position of the transmitter 15. Again, the procedure described in relation to Figure 1 is repeated and the results are shown in Figure 5.

In this case, the wave field response phase curve 53 initially follows the curve 52 of the results from Figure 2 but soon after an offset of 3km, the results follow a straight line which has the same slope as the line 51 of the Figure 1 situation. The change in slope of the curve 52 clearly shows the presence of a boundary between an H/C reservoir and no H/C reservoir. The position of the boundary 19 can be deduced from the position of the change in slope.

The situation shown in Figure 4 is similar to that of Figure 3 except that in this case, the receiver 25 is located in a well bore 27 and the transmitter 26 is moved to different locations to vary the offset. Once again, the procedure described in relation to Figure 1 was repeated and the results are shown in Figure 5.

Due to the location of the receiver 25 in a well bore 27 and within the reservoir 18, the phase curve 54, as the offset increases, follows a straight line initially. The slope of the initial portion is shallower than the slope of the curve 51 where no H/C reservoir was present, due to the effect of the presence of a direct wave propagated through the H/C reservoir. However, soon after an offset of 3km, the slope of the curve 54 begins to change and continues to change until it attains the same slope as the curve 51 of Figure 1. This change again shows clearly the presence of an H/C reservoir boundary and its position can be deduced from the position of the change in the slope of the curve 54.

Claims

1. A method of investigating subterranean strata which comprises: deploying an electric dipole transmitter antenna; deploying an electric dipole receiver antenna at a predetermined offset distance from the transmitter; applying an electromagnetic (EM) wave field to the strata using the transmitter; detecting the EM wave field response using the receiver; extracting phase information from the wave response; repeating the procedure with the transmitter and/or receiver in different locations for a plurality of transmissions; and using the phase information from the wave response for the plurality of transmissions, in order to determine the presence and/or nature of any reservoir present; in which method, the wavelength of the transmission is given by the formula

$$0.1s \leq \lambda \leq 10s;$$

wherein λ is the wavelength of the transmission through the overburden and s is the distance from the seabed to the reservoir; the predetermined offset between the transmitter and a receiver is given by the formula

$$0.5\lambda \leq L \leq 10\lambda;$$

where λ is the wavelength of the transmission through the overburden and L is the distance between the transmitter and the receiver; and the transmission frequency is from 0.01 Hz to 1 kHz.

2. A method as claimed in Claim 1, in which the procedure is repeated at different offsets.
3. A method as claimed in Claim 2, which includes plotting a graph of the phase of the reflected wave response from a particular stratum and identifying a change in

the slope of the graph.

4. A method as claimed in Claim 1, which comprises repeating the procedure at different locations, using the same predetermined offset, and analysing the phase of any refracted wave response from a particular stratum in order to identify a change in the phase value

5. A method as claimed in any preceding Claim, which additionally includes extracting and using amplitude information from the wave response.

6. A method as claimed in any preceding Claim, in which the transmitter and/or receiver is located on or close to the seabed or the bed of some other area of water.

7. A method as claimed in any preceding Claim, in which the frequency of the EM field is continuously varied over the transmission period.

8. A method as claimed in any preceding Claim, in which the field is transmitted for a period of time from 3 seconds to 60 minutes.

9. A method as claimed in Claim 8, in which the transmission time is from 10 seconds to 5 minutes.

10. A method as claimed in any preceding Claim, in which the transmission frequency is from 0.1 to 20 Hz.

11. A method as claimed in any preceding Claim, which includes suppressing any direct wave and/or any other known wave contribution that may disturb the measurements, thereby reducing the required dynamic range of the receiver and increasing the resolution of any refracted wave.

12. A method of surveying subterranean strata which comprises: performing a seismic survey to determine the geological structure of a region and where that survey reveals the presence of a subterranean reservoir, subsequently performing a method as claimed in any preceding Claim.

5

13. A method of producing a survey report which comprises carrying out a method as claimed in any preceding Claim and generating a report based on the results of the investigations.



INVENT FOR IN PEOPLE

Application No: GB0513696.5

Claims searched: 1-13

15

Examiner: Simon Colcombe

Date of search: 10 August 2005

Patents Act 1977: Search Report under Section 17

Documents considered to be relevant:

Category	Relevant to claims	Identity of document and passage or figure of particular relevance
X,E	1, 2, 4-13	EP1460455 A1 (STATOIL) Whole document
X,P	1, 2, 4-13	WO02/14906 A1 (STATOIL) Whole document
X,P	1, 2, 4-13	WO01/57555 A1 (NORSKE STATS OLJESELSKAP) Whole document

Categories:

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art
Y	Document indicating lack of inventive step if combined with one or more other documents of same category	P	Document published on or after the declared priority date but before the filing date of this invention
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application

Field of Search:

Search of GB, EP, WO & US patent documents classified in the following areas of the UKC^X :

G1N

Worldwide search of patent documents classified in the following areas of the IPC⁰⁷

G01V

The following online and other databases have been used in the preparation of this search report

WPI, EPODOC